COMFORT, BEAUTIFULLY ENGINEERED.

Exceptional comfort. Refined by AUX.

T3 inverter wall split air conditioning
Heating and cooling for year-round comfort.



T3 INVERTER

WALL SPLIT | HEAT & COOL

12-CC

Compact comfort

18-CC


Elevated capacity

24-CC

Powerful performance

DESIGNED AS A COMPLETE SYSTEM

Elegant inside. Engineered outside.

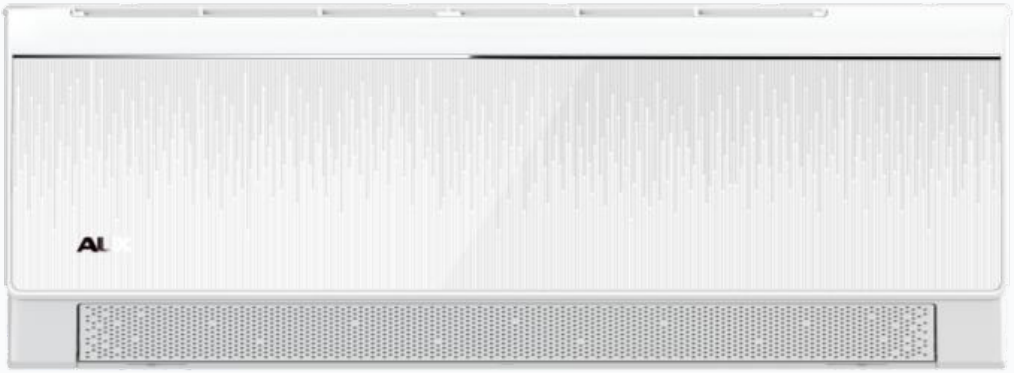



REFINED WALL-MOUNTED DESIGN

A clean white finish and textured front panel bring a considered look to contemporary interiors.



DC inverter system

Variable-capacity comfort.

Heat & cool

One system for changing seasons.

GMCC compressor

Specified across all three variants.

R410A refrigerant

As listed in the supplied catalogue.

Indoor unit, outdoor unit and remote shown from the supplied AUX catalogue.

THE CC SERIES RANGE

Choose your comfort.

Three catalogue variants. One coordinated design language.

12-CC



COOLING CAPACITY
3.54 / 3.15 kW

HEATING CAPACITY
3.75 kW

AIRFLOW
650 m3/h

LOW FAN NOISE
32 dB(A)

INDOOR NET WEIGHT
8.5 kg

18-CC



COOLING CAPACITY
5.28 kW

HEATING CAPACITY
5.30 kW

AIRFLOW
1,250 m3/h

LOW FAN NOISE
36 dB(A)

INDOOR NET WEIGHT
13.5 kg

24-CC



COOLING CAPACITY
6.45 kW

HEATING CAPACITY
6.45 kW

AIRFLOW
1,300 m3/h

LOW FAN NOISE
39 dB(A)

INDOOR NET WEIGHT
13.5 kg

CAPACITY AT A GLANCE

12-CC cooling is listed at T1 / T3 conditions respectively.
18-CC and 24-CC cooling figures are reproduced as supplied;
the source table does not state separate T3 capacity values.

Noise figures above use the lowest numeric indoor fan setting in the source table.

TECHNICAL SPECIFICATIONS

Performance in detail.

PARAMETER	12-CC	18-CC	24-CC
Cooling capacity (W)	3540 / 3150*	5280	6450 (1800-6900)
Heating capacity (W)	3750	5300	6450 (1800-7600)
Cooling input power (W)	960 / 1230*	1450	2050 (340-2420)
Heating input power (W)	1100	1400	1850 (340-3450)
Cooling current (A)	4.5 / 5.2*	6.4	9 (1.5-10.5)
Heating current (A)	4.9	6.3	8 (1.5-15)
Maximum input power (W)	1800	2400	3700
Maximum input current (A)	8.5	13	16
EER cooling (W/W)	3.69 / 2.56*	3.64	3.15
COP heating (W/W)	3.41	3.8	Not stated
Power supply (V / Hz)	208-230 / 60	230 / 60	220-240 / 50
Refrigerant / charge (g)	R410A / 780	R410A / 1000	R410A / 1400
Airflow (m3/h)	650	1250	1300
Dehumidification (kg/h)	0.67	1.6	2.0
Indoor noise (dB(A))	43/40/36/32	50/46/41/36	50/47/43/39
Outdoor noise (dB(A))	54	56	58
Indoor / outdoor net weight (kg)	8.5 / 27	13.5 / 33	13.5 / 40
Indoor dimensions (mm)**	834 x 299 x 202	1145 x 331 x 230	1145 x 331 x 230
Outdoor dimensions (mm)**	785 x 555 x 300	825 x 655 x 335	900 x 700 x 350
Compressor brand	GMCC	GMCC	GMCC
Evaporator / condenser rows	2 / 2	2 / 2	2 / 2
Container loading (sets)***	228	162	144

* T1 / T3 respectively. ** Dimensions follow the source order: W x D x H.
*** Container size is not specified in the supplied catalogue.
Electrical ratings vary by variant; confirm final model nameplate before ordering.
Source: supplied AUX T3 IRAN CC catalogue. Images are illustrative of the series.